



# BARBED WIRE MACHINERY BVM



INDUSTRIAL WIRE






BARBED WIRE WHEEL EXTRACTOR

This machine can produce all kinds of galvanized or plastic coated mild steel barbed wire. Each machine is single motor driven and is equipped with a four speed gear box in oil bath. This vertical machine solution enables very easy access during normal set-up and maintenance operations. The winding reel is perfectly balanced and is equipped with a swivel container into which the finished reel is unloaded. The rolls can weigh up to 50 kg max. (100 lbs). The machine can cater for wooden winding reels too.

Strand Wire Gauge mm	Barb Wire Gauge mm	Output				Power kW	Floor space cm	Net weight kg	Gross weight kg
		pitch	torsions	R.P.M.	m/min				
1,60-2,80	1,60-2,50	60	1,4	460	27,6	11	380x140	2700	3300
		75	1,4	460	34,5				
		100	1,4	460	46,0				
		100	1,7	380	38,0				
		125	1,7	380	47,5				
		125	2,3	288	36,0				
		150	2,3	288	43,2				
		150	2,7	236	35,4				

## BARBED WIRE RANGE

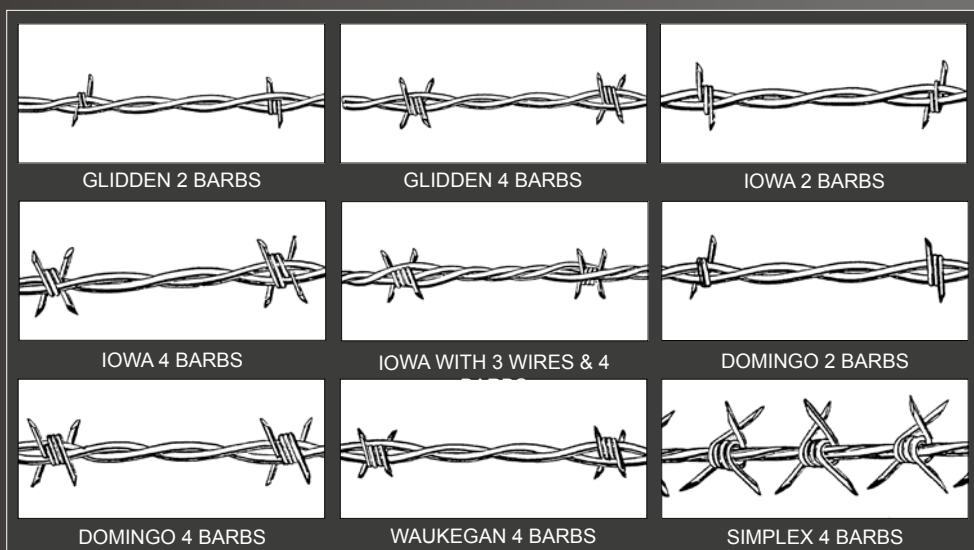

**EUROLLS S.p.A.**  
Via Malignani, 14  
33040 Attimis, Udine - Italy

**EUROLLS WIRE  
MACHINERY DIVISION**  
Via Strada di Salt, 66  
33047 Remanzacco, Udine - Italy

Tel. +39 0432 796511  
Fax. +39 0432 796587

[www.eurolls.com](http://www.eurolls.com)



DETAIL OF IOWA 4 BARBS



DETAIL OF BARB KNOTTING PROCESS

This document contains information and Brands proprietary to Eurolls SpA. Eurolls SpA has a policy of progress development of its products and reserves the right to alter without notice the information within this document.